



- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and moving sign applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)









HLG-40H-12A

Blank: IP67 rated. Cable for I/O connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance

D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.


SPECIFICATION

ATION					T		T	1	T	
	HLG-40H-12	HLG-40H-15	HLG-40H-20	HLG-40H-24	HLG-40H-30	HLG-40H-36	HLG-40H-42	HLG-40H-48	HLG-40H-54	
DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V	
CONSTANT CURRENT REGION Note.4	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V	
RATED CURRENT	3.33A	2.67A	2A	1.67A	1.34A	1.12A	0.96A	0.84A	0.75A	
RATED POWER	39.96W	40.05W	40W	40.08W	40.2W	40.32W	40.32W	40.32W	40.5W	
RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	300mVp-p	300mVp-p	
VOLTAGE ADJ. RANGE Note.6	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	40 ~ 46V	44 ~ 53V	49 ~ 58V	
OUDDENT AD L DANGE	Can be adjust	ed by internal _l	potentiometer	A type only						
CURRENT ADJ. RANGE	2 ~ 3.33A	1.6 ~ 2.67A	1.2 ~ 2A	1 ~ 1.67A	0.8 ~ 1.34A	0.67 ~ 1.12A	0.58 ~ 0.96A	0.5 ~ 0.84A	0.45 ~ 0.75	
VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
SETUP, RISE TIME Note.8	1500ms, 80ms	s / 115VAC at f	ull load 1	000ms, 80ms /	230VAC at full	load				
HOLD UP TIME (Typ.)	16ms/230VA0	C 16ms/1	15VAC at full	load						
VOLTAGE RANGE Note.5	90 ~ 305VAC	127 ~ 43	1VDC							
FREQUENCY RANGE	47 ~ 63Hz									
POWER FACTOR (Typ.)	PF>0.98/115V	AC, PF>0.95/2	230VAC, PF>0).92/277VAC at	full load (Pleas	se refer to "Pow	ver Factor Char	acteristic" cur	/e)	
									,	
	86.5%	86.5%	88%	88%	88.5%	88.5%	88.5%	89.5%	89.5%	
LEAKAGE CURRENT	<0.75mA / 277VAC									
OVER CURRENT Note.4										
SHORT CIRCUIT										
OHORY OHOOTI					1	41~49V	48 ~ 58V	54 ~ 65V	59 ~ 68V	
OVER VOLTAGE							10 001	0. 00.	100 001	
OVED TEMPEDATURE										
	,		,							
			19							
	,		la nariad far	70min aaah al	V V 7	•				
VIDRATION							0 1 1 1 4	IDCE IDC7	104047.4	
SAFETY STANDARDS Note.7							o maepenaem	, 1200 01 1207 ,	J01347-1,	
WITHOTAND VOLTAGE						EN60335-1				
	,					0.00				
	-			•			410.0			
	-				5024, light ind	ustry level (sur	ge 4KV), criter	ia A		
	\									
			UET.							
	0.73Kg; 20pcs				1°C					
PACKING			at 230VAC in	put. rated load	and 25 of a	ambient tempe	rature.			
1. All parameters NOT special						vith a 0 1uf & 4		apacitor		
All parameters NOT special Ripple & noise are measure Tolerance : includes set up	ed at 20MHz o tolerance, line	f bandwidth by regulation an	y using a 12" d load regulat	twisted pair-wir		with a 0.1uf &		apacitor.		
All parameters NOT special Ripple & noise are measure Tolerance : includes set up Please refer to "DRIVING N	ed at 20MHz of tolerance, line METHODS OF	f bandwidth by regulation an LED MODUL	y using a 12" d load regulat .E".	twisted pair-wir ion.	re terminated v			apacitor.		
All parameters NOT special Ripple & noise are measure Tolerance: includes set up Please refer to "DRIVING N Derating may be needed ur	ed at 20MHz of tolerance, line METHODS OF	f bandwidth by regulation an LED MODUL	y using a 12" d load regulat .E".	twisted pair-wir ion.	re terminated v			apacitor.		
All parameters NOT special Ripple & noise are measure Tolerance : includes set up Please refer to "DRIVING N	ed at 20MHz or tolerance, line METHODS OF inder low input of ter to EN60598	f bandwidth by regulation an LED MODUL voltages. Plea i-1, CNS15233	y using a 12" d load regulat E". ase check the	twisted pair-wir ion. static characte FCC part18.	re terminated v	e details.	47uf parallel ca			
	DC VOLTAGE CONSTANT CURRENT REGION Note.4 RATED CURRENT RATED POWER RIPPLE & NOISE (max.) Note.2 VOLTAGE ADJ. RANGE Note.6 CURRENT ADJ. RANGE VOLTAGE TOLERANCE Note.3 LINE REGULATION LOAD REGULATION SETUP, RISE TIME Note.8 HOLD UP TIME (Typ.) VOLTAGE RANGE Note.5 FREQUENCY RANGE POWER FACTOR (Typ.) TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) AC CURRENT (Typ.) LEAKAGE CURRENT OVER CURRENT Note.4 SHORT CIRCUIT OVER VOLTAGE OVER TEMPERATURE WORKING HUMIDITY STORAGE TEMP. WORKING HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS Note.7 WITHSTAND VOLTAGE ISOLATION RESISTANCE EMC EMISSION EMC IMMUNITY MTBF DIMENSION	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE 12V 15V 20V 24V 30V 36V 36V CONSTANT CURRENT REGION Notes. 4 72 - 12V 9 - 15V 12 - 20V 14.4 - 24V 18 - 30V 21.6 - 36V RATED CURRENT 3.33A 2.67A 2A 1.67A 1.34A 1.12A 1.12A A 1	DC VOLTAGE 12V	DC VOLTAGE	


9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

10. Refer to warranty statement.



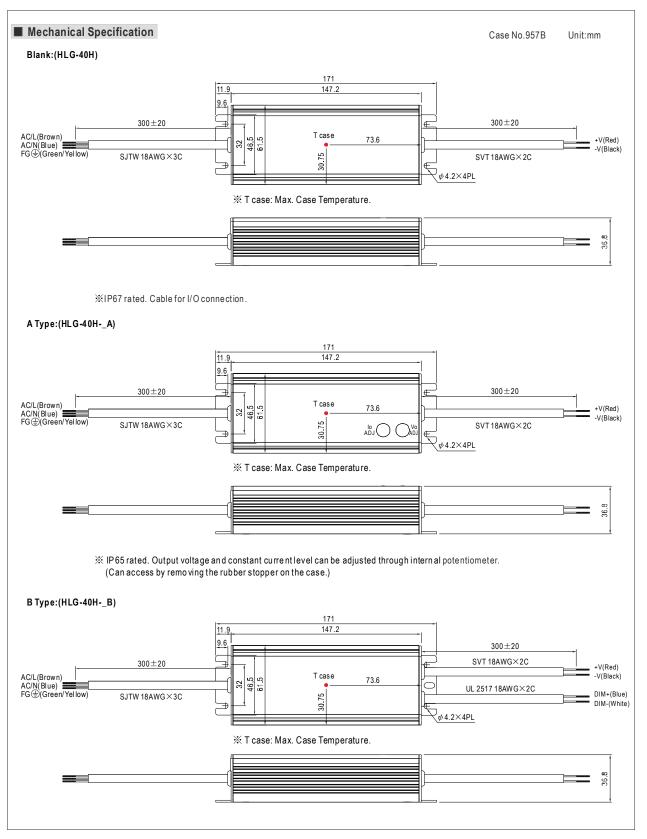



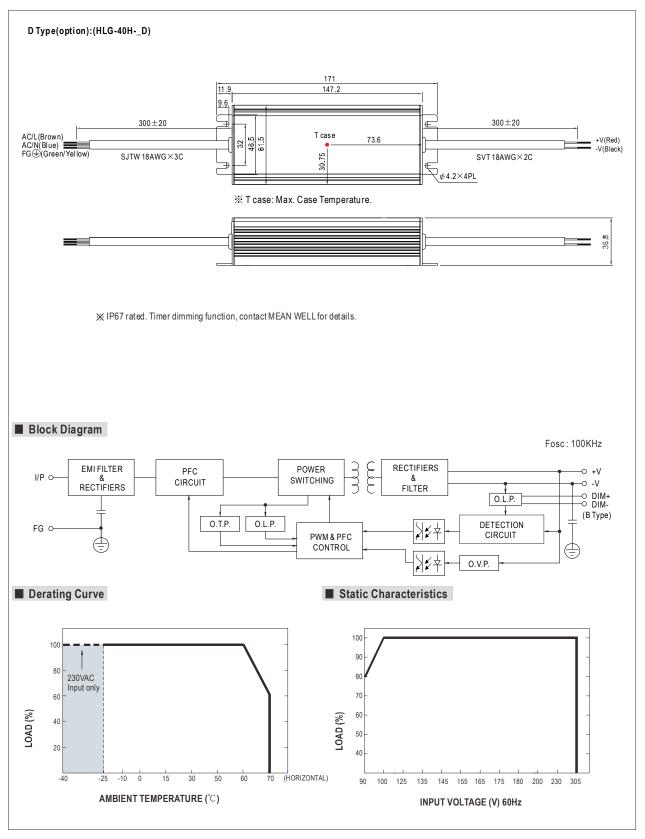




■ Power Factor Characteristic



■ EFFICIENCY vs LOAD (48V Model)

 $HLG-40\,H$ series possess superior working efficiency that up to $89.5\,\%$ can be reached in field applications.

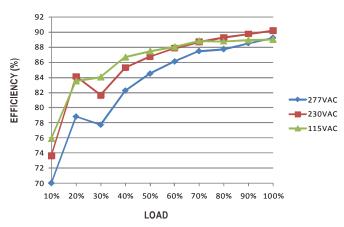


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive me thod "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

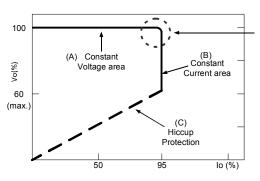


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



■ DIMMING OPERATION (for B-type only)



- ※ Please DO NOT connect "DIM-" to "-V".
- ※ Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90K Ω	100K Ω	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100K Ω /N	
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 1 ~ 10 V dimming function for output current adjustment (Typical)

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


¾ 10V PWM signal for output current adjustment (Typical): Frequency range: 10 0Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

**Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

 \frak{M} Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF:

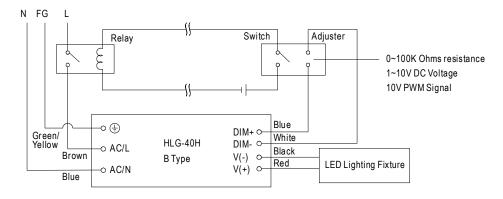

Using a switch and relay can turn ON/OFF the lighting fixture.


- 1.Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/O FF by the switch.



■ WATERPROOF CONNECTION


Waterproof connector

 $Waterproof connector \ can \ be \ assembled \ on \ the \ output \ cable \ of \ HLG-40H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$




Size	Pin Configuration (Female					
M12	00	%				
IVIIZ	4-PIN	5-PIN				
	5A/PIN	5A/PIN				
Order No.	M12-04	M12-05				
Suitable Current	10A max.	10A max.				

Size	Pin Configuration (Female)					
M15	00					
	2-PIN					
	12A/PIN					
Order No.	M15-02					
Suitable Current	12A max.					



O Cable Joiner

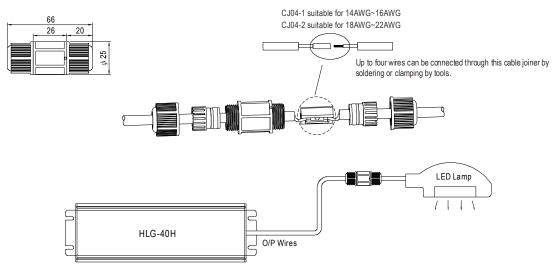

%CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No. : CJ04-1, CJ04-2.